

TOOLS REQUIRED


1/8" Allen Wrench

INSTRUCTIONS

Sash tension can be adjusted without replacement of the entire balance system. By inserting the supplied Allen Screws into the holes in the brake shoes, tension can be adjusted to the level desired.

- 1) Remove sash.
- 2) Locate the brake shoes in the jamb channels.
- 3) Place the Allen Screw on end of a 1/8" Allen Wrench.
- 4) Holding the Wrench & Screw as straight as possible, insert the screw clockwise into the hole in the brake shoe. The screw will cut it's own threads.

Note: Overtightening of the screw will damage the threads. Tension can be adjusted by turning the screw clockwise or counter-clockwise.

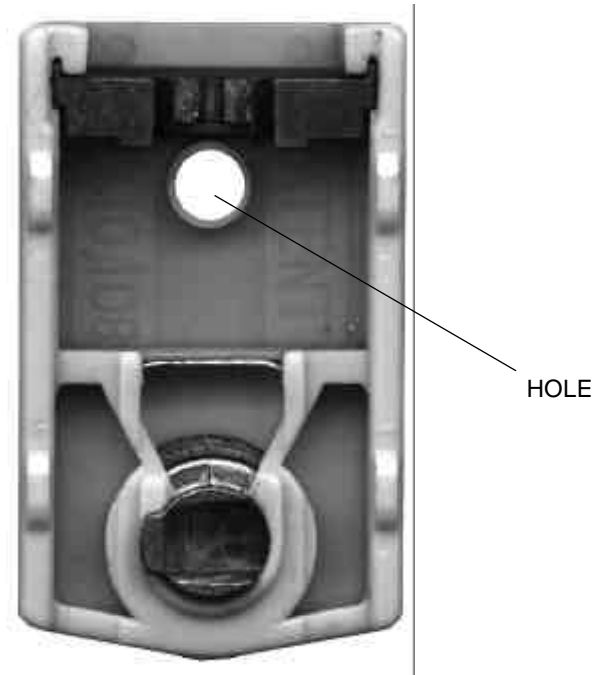

BRAKE SHOE

ALLEN SCREW



**1/8" ALLEN
WRENCH**